


**FABBRICANO
CERAMICHE**
AN ITALIAN ARCHITECTURAL FABRIC

FABBRICANO

PGVT | GVT | WOOD



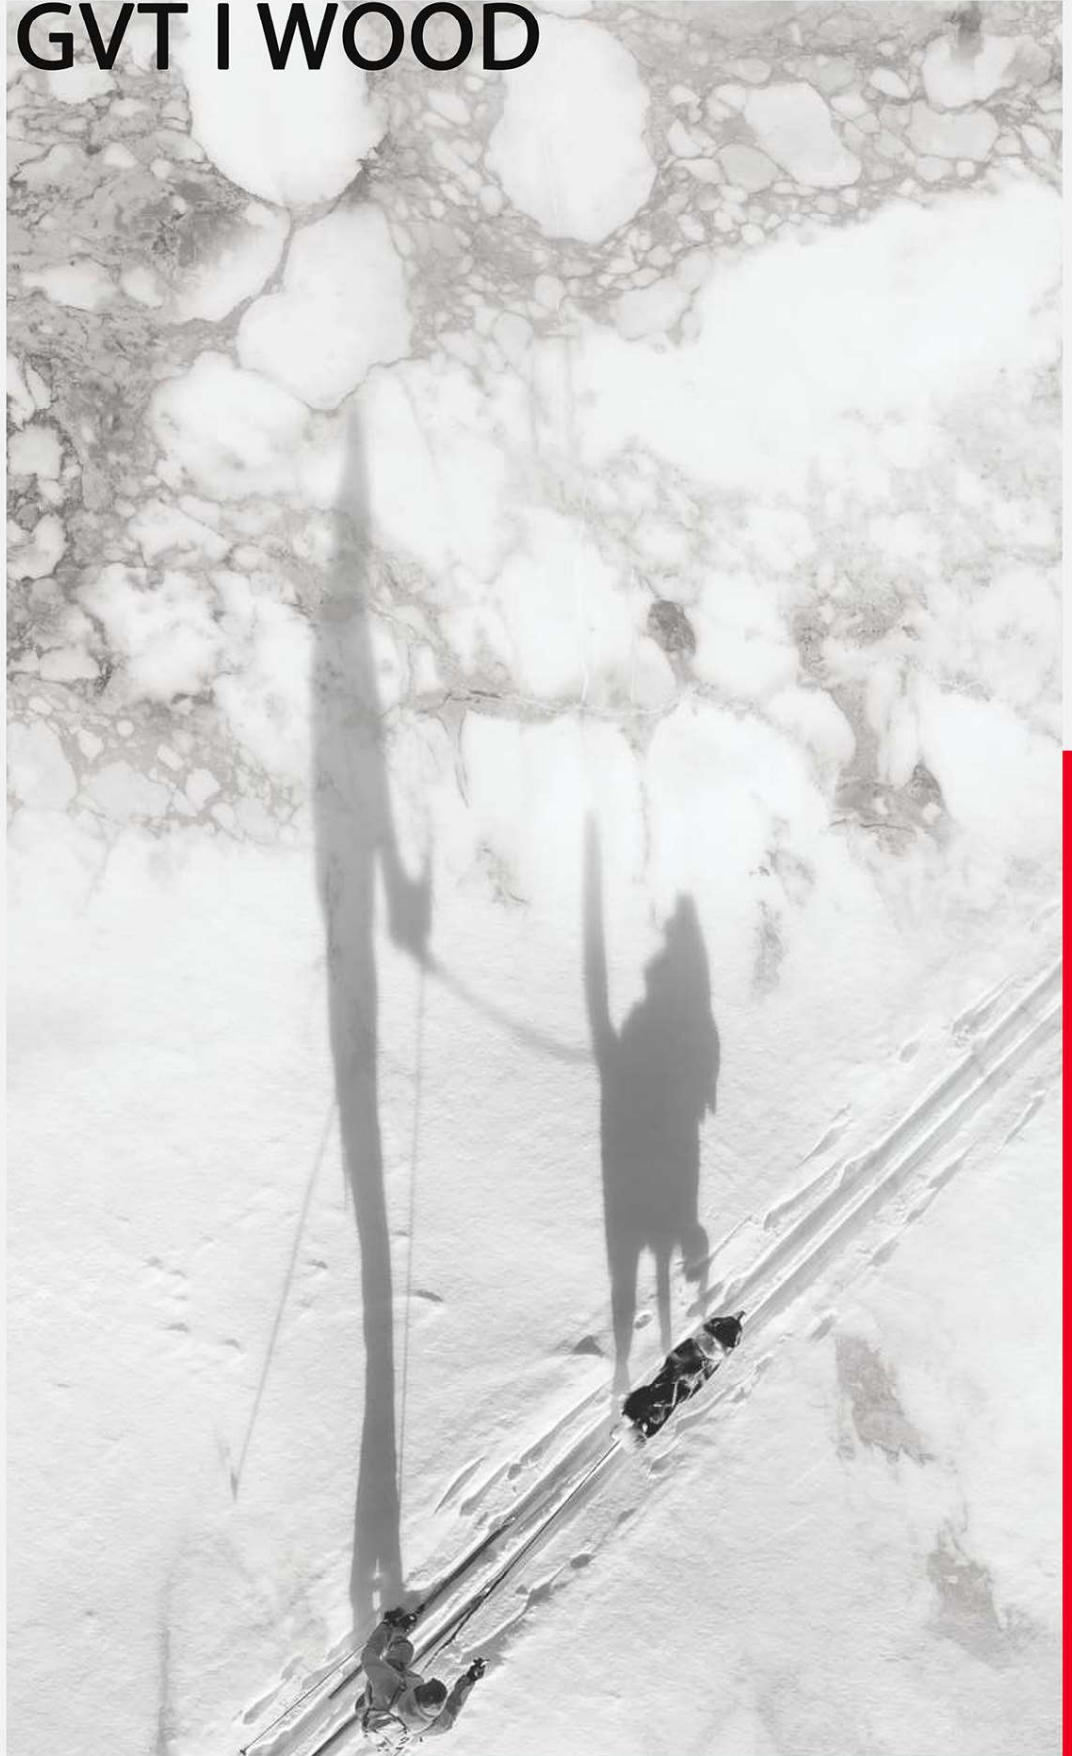

Fabbricano Ceramiche has been manufacturing tiles since 1996. Our vision is to become a benchmark in the ceramics industry by providing a world-class tiling solution that makes homes and lives happier. We aim to provide luxury to customers increasing the value for their money.

GLAZED VITRIFIED TILES

Bianco-grande



Ash - grande

GLAZED VITRIFIED TILES

Grande-mushroom



Mocha-grande

GLAZED VITRIFIED TILES

Pietra-dove



Legend-gris-grande

GLAZED VITRIFIED TILES

Eternity-dove-ash



Eternity-dove

POLISHED GLAZED VITRIFIED TILES

Alabastrino-bianco



POLISHED GLAZED VITRIFIED TILES



Serpeggiante-grey-grande



Ukraine-fire-grande

POLISHED GLAZED VITRIFIED TILES



Onyx-gold-grande



Onyx-smoke-grande

POLISHED GLAZED VITRIFIED TILES



Elegant-satuario



Elegant-marquina-grande

POLISHED GLAZED VITRIFIED TILES



Calcatta-bronze-grande



Cararra

POLISHED GLAZED VITRIFIED TILES



Calcatta-bronze-grande



Milas-black-grande

POLISHED GLAZED VITRIFIED TILES



Calacatta-bronze-grande



Breccia-gold-royal

POLISHED GLAZED VITRIFIED TILES



Agariya-grey-grande



Absolute-onyx

FABBRICANO WOOD



Amberwood-grey-blends



Amberwood-brown-grande

FABBRICANO WOOD



Bark-wood-cherry-grande



Amberwood-olive-grande

AMBERWOOD OLIVE BLEND

FABBRICANO WOOD



Bark-wood-choco-grande



Bark-wood-honey-grande

FABBRICANO WOOD



Swiss-olive-grande



Heritage-wood-grande

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP B _{1a}	MEAN VALUE PGVT	MEAN VALUE GVT	METHOD OF TESTING
REGULATORY PROPERTIES				
Deviation in length & width	± 0.5 %	± 0.1 %	± 0.1 %	ISO-10545-2
Deviation in thickness	± 5.0 %	± 4.0 %	± 4.0 %	ISO-10545-2
Straightness in side	± 0.5 %	± 0.1 %	± 0.1 %	ISO-10545-2
Rectangularity	± 0.6 %	± 0.1 %	± 0.1 %	ISO-10545-2
Surface flatness	± 0.5 %	± 0.2 %	± 0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min. 90%	Min. 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101
THERMO HYGROMETRIC PROPERTIES				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg	> 0.40	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg	Does not yield Pb. & Cd.	Does not yield Pb. & Cd.	ISO-10545-15



Fabbricano Ceramiche Pvt Ltd.

First floor, sun complex, 8-A National highway, Lalpar Morbi, Gujarat-363642

info@fabbricanoceramiche.com | www.fabbricanoceramiche.com

+91- 98082 43333